


MILEPOST MARKER DETAILS FRONT VIEW

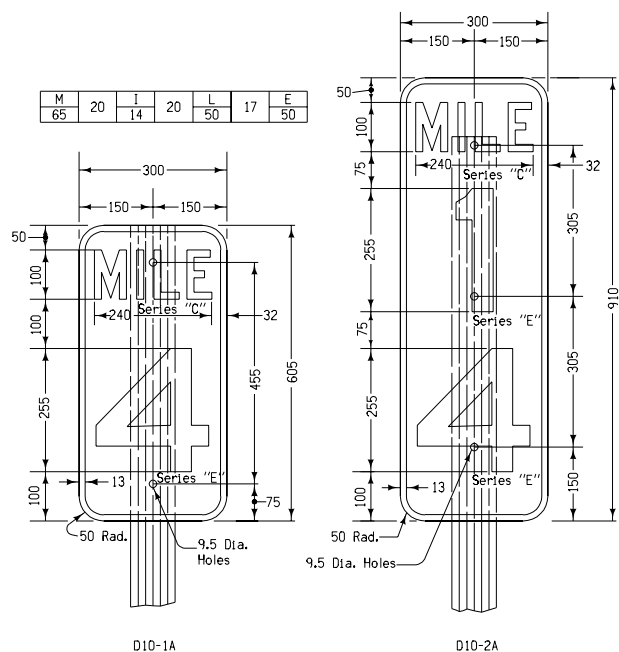


D10-1A


D10-2A

D10-3A


Aluminum bolts, self-locking nuts, and washers.
8mm x 57mm - 18 NC hex bolts and hex self-
locking nuts with washers 9mm I.D. x 17mm
O.D. x 2.3mm.

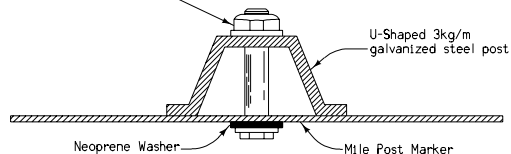


TOP VIEW
MILEPOST MARKER ASSEMBLY

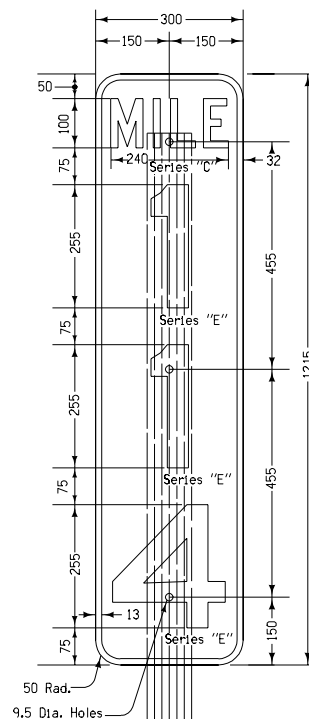

D10-3A

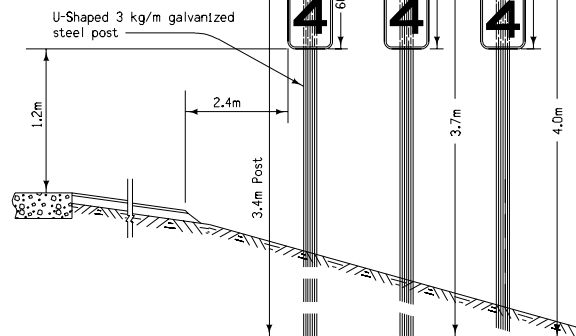


MILEPOST MARKER - SHOULDER ERECTION

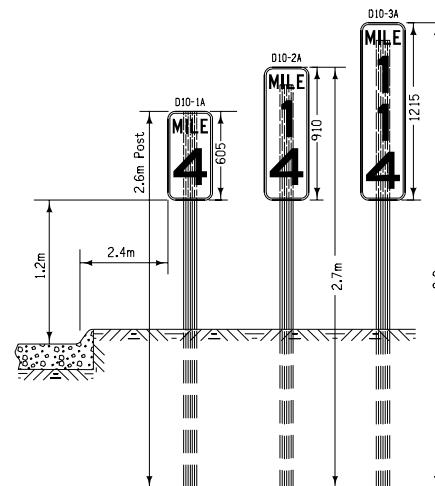

MILEPOST MARKER - CURB ERECTION

NOTES:
Material = 3.2mm sheet aluminum
Holes = 9.5mm dia. holes located as indicated
Letters = 100mm Series C
Numerals = 250mm Series E
Border, letters and numerals = smooth silver
reflective sheeting
Background = green reflective sheeting
POSTS
Contractor will furnish and install Type 1 deline-
ator posts as specified by the Standard Specification.

All dimensions given in millimeters unless noted.

METRIC VERSION	M	 Iowa Department of Transportation Highway Division	
		STANDARD ROAD PLAN	
		RD-30	
		REVISION: NEW	REVISION NO. NEW
		<i>William J. Stem</i>	REVISION DATE 04-15-03
		APPROVED BY DESIGN METHODS ENGINEER	
FABRICATION AND ERECTION DETAILS FOR MILEPOST MARKERS			